



Fig. 1

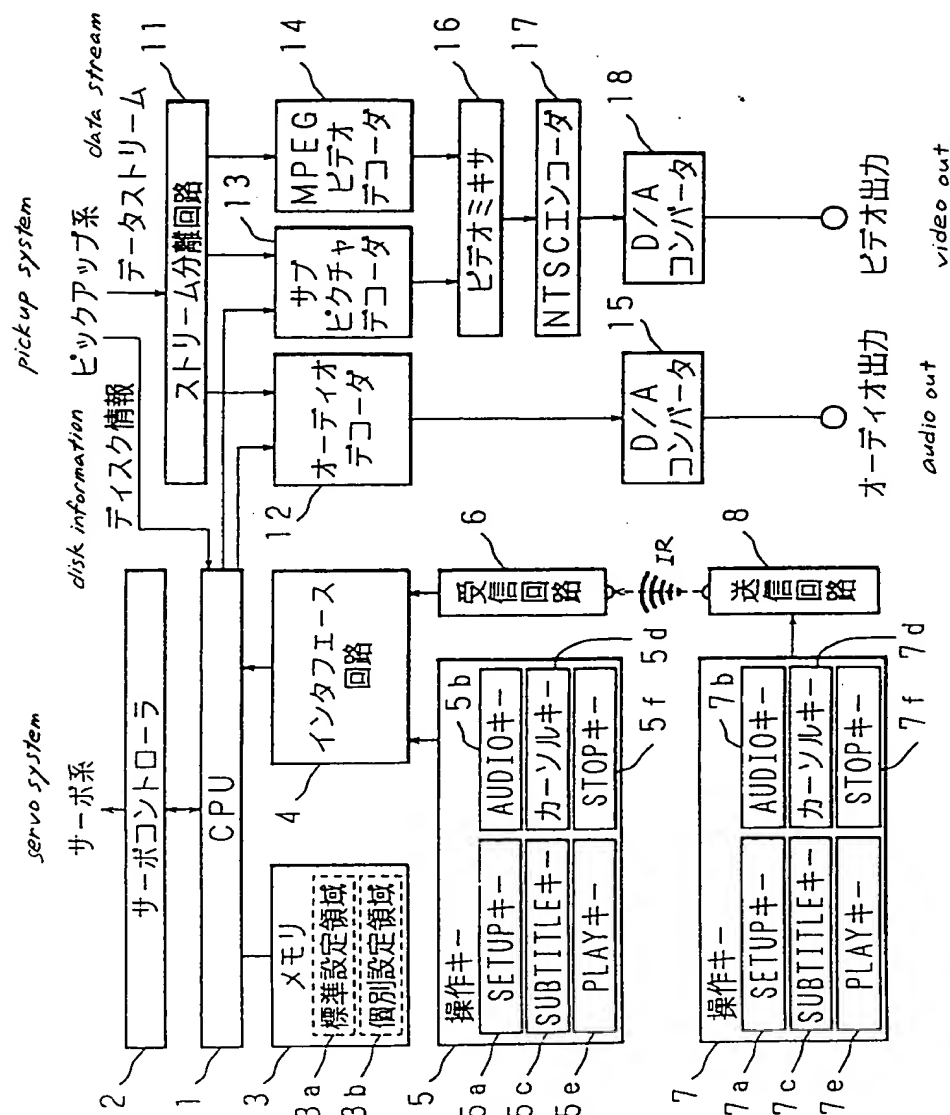

- 2: servo controller
- 3: memory
- 3a: standard setting area
- 3b: discrete setting area
- 4: interface circuit
- 5: operation keys
- 5a: SETUP key
- 5b: AUDIO key
- 5c: SUBTITLE key
- 5d: cursor key
- 5e: PLAY key
- 5f: STOP key
- 6: receiving circuit
- 7: operation keys
- 7a: SETUP key
- 7b: AUDIO key
- 7c: SUBTITLE key
- 7d: cursor key
- 7e: PLAY key
- 7f: STOP key
- 8: transmission circuit
- 11: stream separation circuit
- 12: audio decoder
- 13: subpicture decoder
- 14: MPEG video decoder
- 15: D/A converter
- 16: video mixer
- 17: NTSC encoder
- 18: D/A converter

Fig. 2

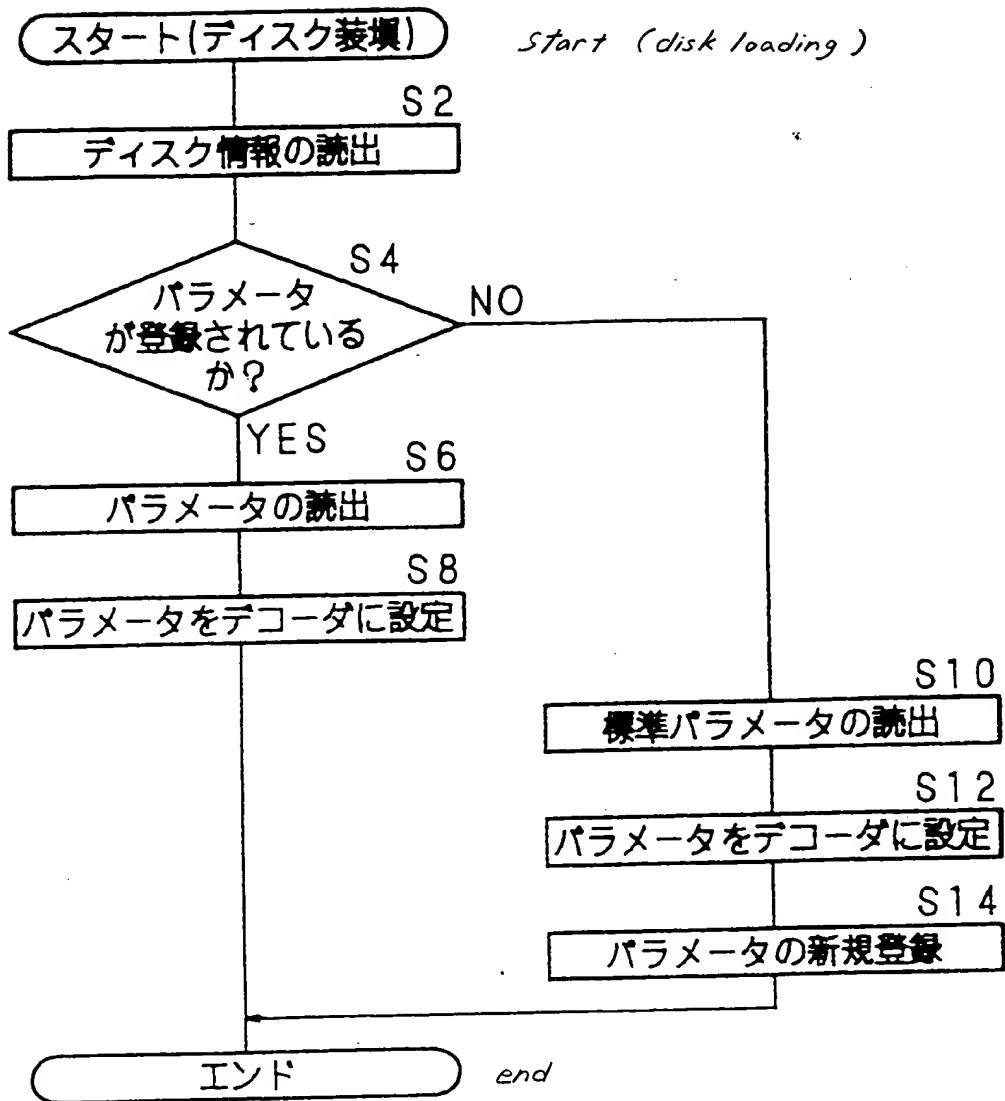

S2: read out disk information

S4: parameter has been registered in discrete setting area?

S6: read out parameter


S8: set parameter to decoders

S10: read out standard parameter

S12: set standard parameter to decoders

S14: register standard parameter in discrete setting area

Fig. 3

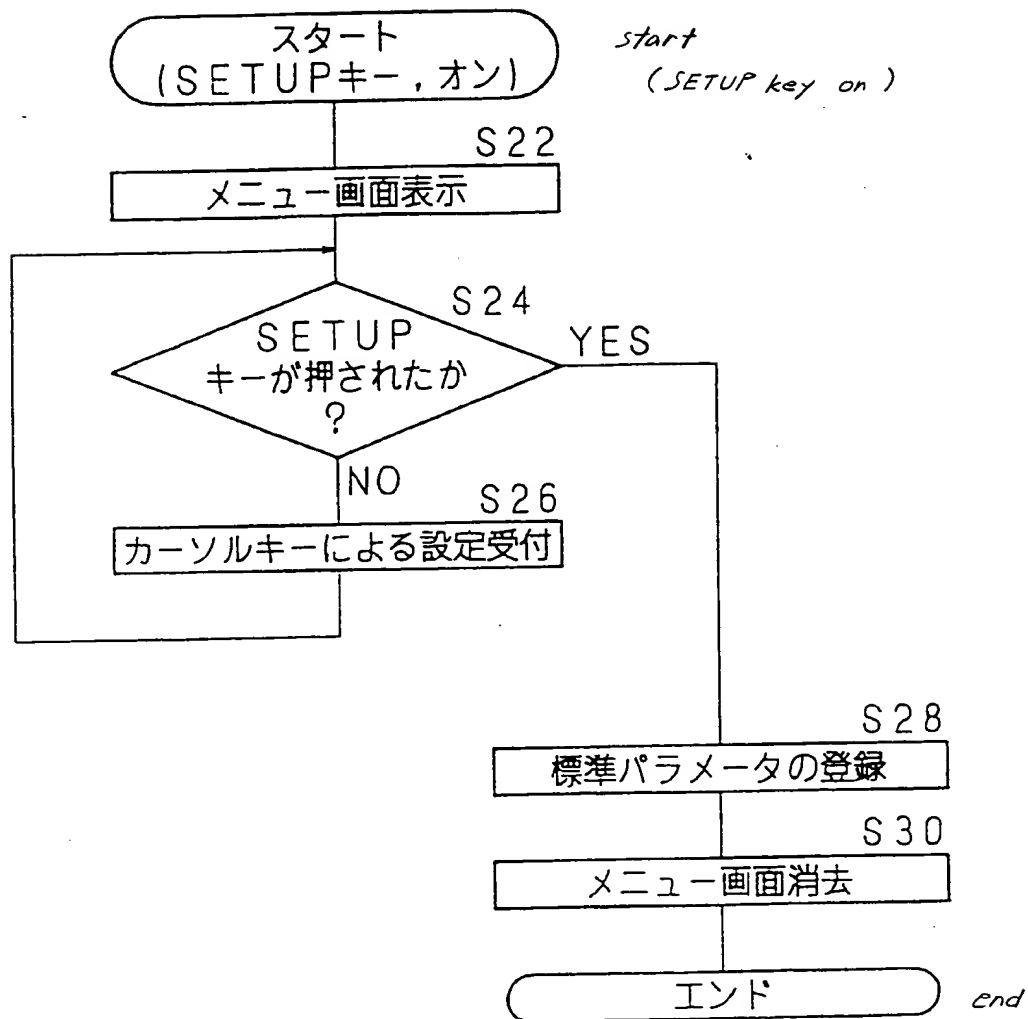

S22: display menu screen

S24: SETUP key is depressed?

S26: accept parameter setting with cursor key

S28: register standard parameter

S30: erase menu screen

Fig. 4

standard parameter setting

● 標準パラメータの設定

音声 *voice*

英語	日本語	ドイツ語	フランス語	中国語
<i>English</i>	<i>Japanese</i>	<i>German</i>	<i>French</i>	<i>Chinese</i>


字幕 *subtitles*

英語	日本語	ドイツ語	フランス語	中国
<i>English</i>	<i>Japanese</i>	<i>German</i>	<i>French</i>	<i>Chine</i>

ディスク情報 (複数指定可)
disk information (plural setting available)

BCA	延べ再生時間	チャプタ数	ビットパターン
	<i>total time</i>	<i>number of chapter</i>	<i>bit pattern</i>

Fig. 5

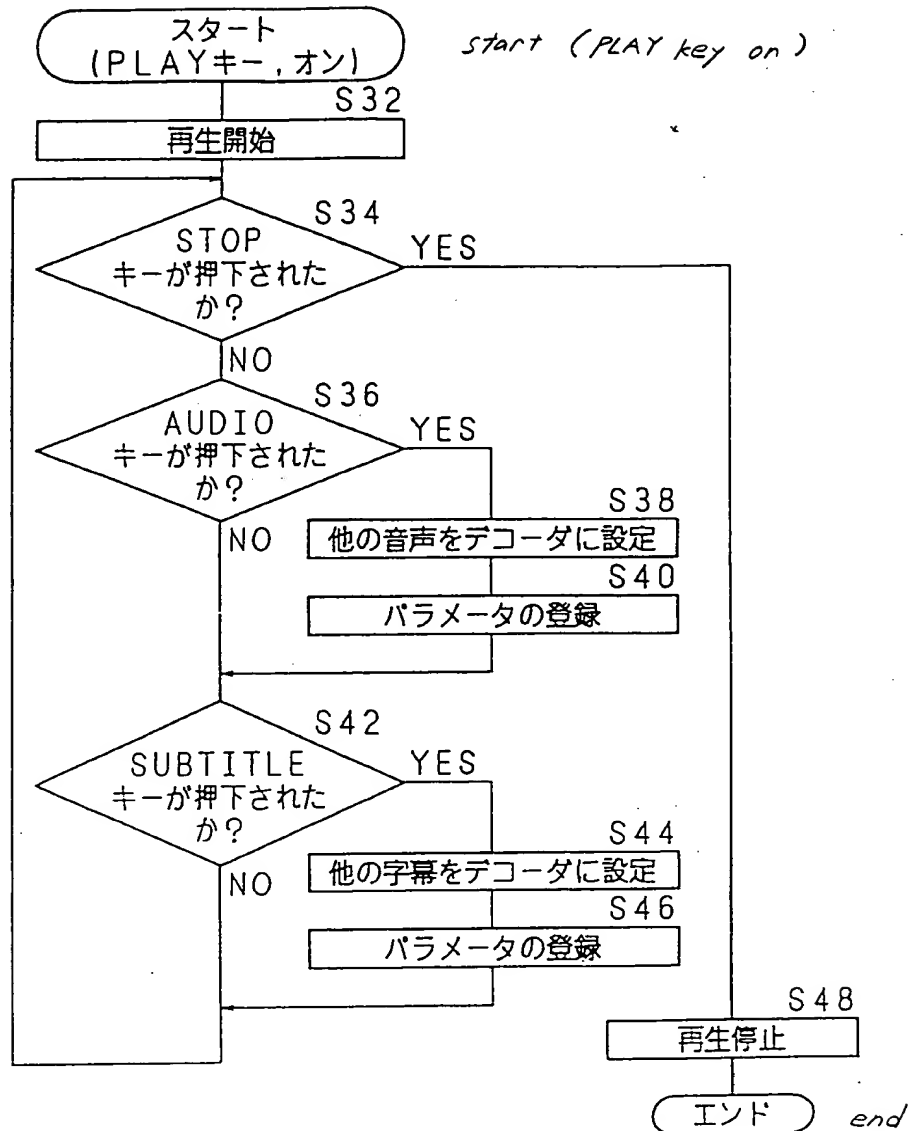

- S32: start reproduction
- S34: STOP key is depressed?
- S36: AUDIO key is depressed?
- S38: set another dubbed audio to audio decoder
- S40: register parameter
- S42: SUBTITLE key is depressed?
- S44: set another subtitles to subpicture decoder
- S46: register parameter
- S48: stop reproduction